

NANLUX

INNOVATE · ILLUMINATE



WWW.NANLUX.COM

Distributed by

KAISER[®]
FOTOTECHNIK



Brand Concept

Dedicated to creating more high-quality products that are more professional, simpler and faster setup for movie, TV, broadcast and media applications.



© Ildar Nizametdinov





The rising expectations in modern professional lighting systems are seeking new levels of control, precision and customization. From compatibility in wireless protocols to ever expanding flexibility to help achieve new levels of creativity.

The evolution of 21st century productions have inspired products and methods to provide convenience and time saved on set - simpler and faster setup, intelligentization for storing repeatable scene settings for later use.

NANLUX, as a professional lighting brand, through its parent company - NANGUANG, listens to the needs from our active and creative customers to help push the envelope of what is possible. With our nearly 30 years of experience, we have the expertise to make professional clients' requests a reality through our product lines. The future is unknown, but Nanlux will be there on the cutting edge of what is possible!

Contents

04-05	Evoke 900C
06-07	Evoke 1200 / 1200B
08-11	Evoke 2400B
12-13	Dyno 650C / 1200C
14-15	TK-140B / 280B
16-17	TK-200 / 450

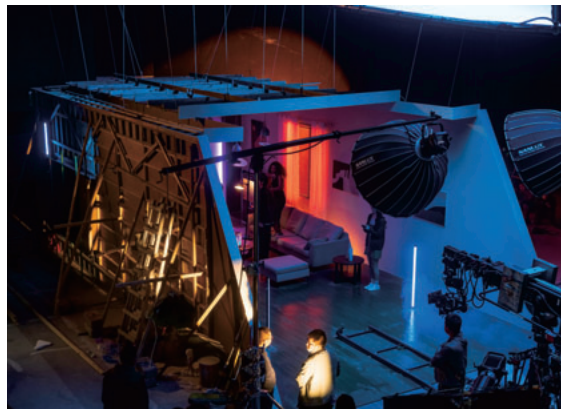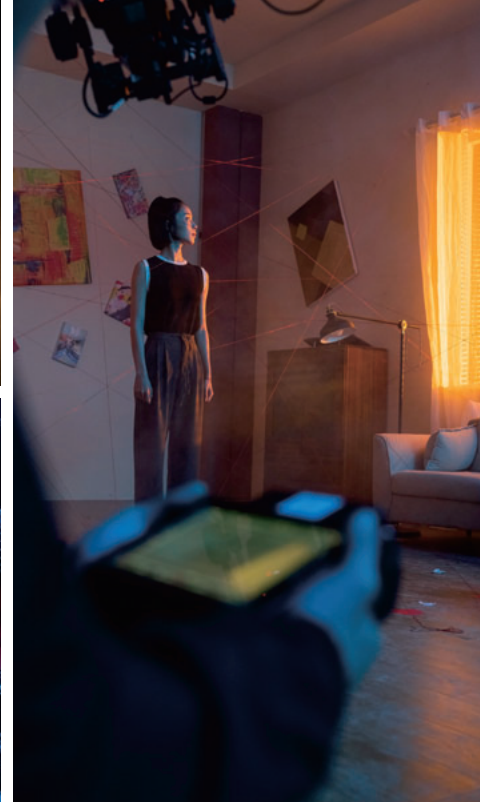


Evoke 900C

Full color

LED RGBLAC Spot Light

- 1. RGBLAC Color Mixing System** Full color LED spotlight equipped with RGBLAC six color mixing system
- 2. Ultra-high Brightness Output** Staggering luminance of 12,940 lux at 3m (at 5600K, with 45° reflector), with a rated output of 940W
- 3. Ultra-wide CCT Range** 1,800K-20,000K with G/M $\pm$ 200 adjustment
- 4. More Color Modes** Advanced HSI, RGBW, XY Coordinate and GEL mode
- 5. IP55 Weather Resistant** Sturdy build quality with both fixture and power supply IP55 rated
- 6. Fully Dimmable Lighting** from 0-100% in ultra-precise 0.1% increment
- 7. Comprehensive Wired and Wireless Control Methods** On-board, DMX/RDM, Art-Net/sACN, LumenRadio CRMX, Remote Controller and NANLINK APP
- 8. Built-in 15 customisable practical effects**

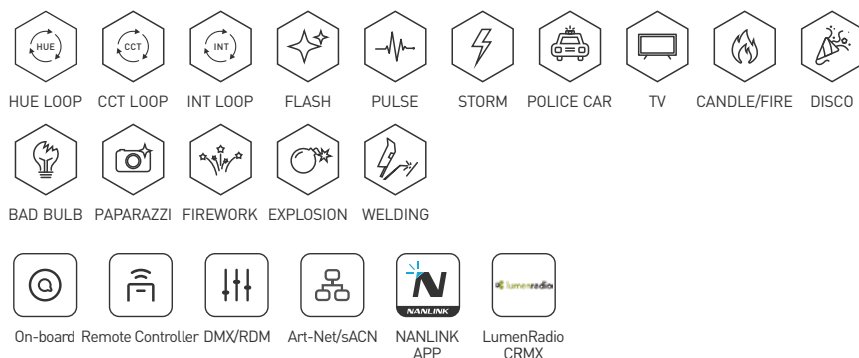

NAB SHOW
of the
PRODUCT
YEAR 2023
WINNER



Evoke 900C

Includes

Evoke 900C × 1, Yoke × 1, Power Supply × 1, Reflector × 1, DC Connection Cable 7.5M × 1, AC Power Cable 6M × 1, USB Flash Drive × 1, AS-CP-QR-EV Quick Release Clamp × 1, WS-RC-C2 Remote Controller × 1, User Manual × 1, CC-ST-EV900C Trolley Case × 1

Multiple Accessories, More Applications

						
AS-PJA-NLM NL Mount Projection Adapter Art.-Nr.: 93088	FL-28 Fresnel Lens Art.-Nr.: 93062	FL-35YK Fresnel Lens Art.-Nr.: 93063	SB-NLM-120/150-PR Parabolic Softbox 120/150cm Art.-Nr.: 93065/93066	SB-NLM-150-O Octagonal Softbox 150cm Art.-Nr.: 93067	SB-NLM-100-S Square Softbox 100cm Art.-Nr.: 93064	LT-NLM-120 Lantern Softbox 120cm Art.-Nr.: 93068
						
RF-NLM-26/45/60 NL Mount Reflector 26°/45°/60° Art.-Nr.: 93069/70/71	FR-JP-2 Two-light Frame with Junior Pin Art.-Nr.: 93090	FR-JP-4 Four-light Frame with Junior Pin Art.-Nr.: 93091	CB-EV1200-10M/12M Connection Cable 10M/12M Art.-Nr.: 93085/93086	WC-LM6P-C1 Wired Controller Art.-Nr.: 93046	CB-LM6P-8M Connection Cable Art.-Nr.: 93040	

Evoke 900C		Technical Data													
Model		Evoke 900C													
Rated Power		940W													
Input Voltage/Current		DC 48V/18.75A Max, AC 100-240V 50/60Hz													
CCT		1800K-20000K (G/M±200)													
CRI/TLCI		Average 96													
TM-30		Rf: Average 94 / Rg: Average 100													
Dimming		0-100%, stepless 0.1% from 0-100%													
IP Rating		IP55													
Control		On-board, Remote Controller, NANLINK APP, DMX/RDM, LumenRadio CRMX, Art-Net/sACN													
Effects		HUE Loop, CCT Loop, INT Loop, Flash, Pulse, Storm, Police Car, TV, Paparazzi, Candle/Fire, Disco, Bad Bulb, Firework, Explosion, Welding													
Product Size		Light Fixture (without COB protective cap): 330 × 241 × 210mm / 13.0 × 9.5 × 8.3" Power Supply: 146 × 125 × 344mm / 5.7 × 4.9 × 13.5"													
Product Weight		Light Fixture: 7.7kg / 16.98lb Power Supply: 4.5kg / 9.92lb													
Illumination(lux/ft)															
	Light Only					With Fresnel 11°					With Fresnel 45°				
CCT	3200K	5600K	R	G	B	3200K	5600K	R	G	B	3200K	5600K	R	G	B
3M	4250 lux 395 fc	4341 lux 403 fc	800 lux 74 fc	1835 lux 170 fc	210 lux 20 fc	42540 lux 3952 fc	43270 lux 4020 fc	7920 lux 736 fc	17690 lux 1643 fc	2040 lux 190 fc	10160 lux 944 fc	10420 lux 968 fc	1788 lux 166 fc	4561 lux 424 fc	520 lux 48 fc
5M	1656 lux 154 fc	1688 lux 157 fc	300 lux 28 fc	720 lux 67 fc	83 lux 8 fc	15100 lux 1403 fc	15470 lux 1437 fc	2760 lux 256 fc	6223 lux 578 fc	710 lux 66 fc	3820 lux 355 fc	3923 lux 364 fc	681 lux 63 fc	1720 lux 160 fc	199 lux 18 fc
7M	925 lux 86 fc	945 lux 88 fc	173 lux 16 fc	398 lux 37 fc	46 lux 4 fc	7898 lux 734 fc	8056 lux 748 fc	1407 lux 131 fc	3256 lux 302 fc	360 lux 33 fc	2057 lux 191 fc	2108 lux 196 fc	352 lux 33 fc	915 lux 85 fc	102 lux 9 fc
	With 26° Reflector					With 45° Reflector					With 60° Reflector				
CCT	3200K	5600K	R	G	B	3200K	5600K	R	G	B	3200K	5600K	R	G	B
3M	39530 lux 3672 fc	40300 lux 3744 fc	7020 lux 652 fc	16580 lux 1540 fc	1860 lux 173 fc	12810 lux 1190 fc	12940 lux 1202 fc	2266 lux 211 fc	5282 lux 491 fc	530 lux 49 fc	8240 lux 765 fc	8541 lux 793 fc	1362 lux 127 fc	3528 lux 328 fc	320 lux 30 fc
5M	12300 lux 1143 fc	12560 lux 1167 fc	2317 lux 215 fc	5280 lux 491 fc	580 lux 54 fc	4404 lux 409 fc	4501 lux 418 fc	842 lux 78 fc	1854 lux 172 fc	180 lux 17 fc	3038 lux 282 fc	3110 lux 289 fc	528 lux 49 fc	1277 lux 119 fc	140 lux 13 fc
7M	6036 lux 561 fc	6176 lux 574 fc	1121 lux 104 fc	2562 lux 238 fc	260 lux 24 fc	2266 lux 211 fc	2305 lux 214 fc	402 lux 37 fc	958 lux 89 fc	102 lux 9 fc	1642 lux 153 fc	1693 lux 157 fc	309 lux 29 fc	717 lux 67 fc	72 lux 7 fc



Evoke 1200 / 1200B

LED Spot Light

1. Choice of models: 5600K / 2700K-6500K
2. Revolutionary new 1.2kW LED spotlight, powerful output comparable to 1.8KW PAR or 2.5KW HMI Fresnel
3. IP54 rating weather resistance
4. Support both wired and wireless control via NANLINK APP, DMX/RDM, Remote Control and Lumenradio CRMX
5. Fully dimmable from 0-100% in ultra-precise intervals of just 0.1%
6. Multiple optional modifiers and compatible with DoPchoice
7. Built-in 11/12 customisable practical effects



Evoke 1200B

Evoke 1200




Includes:

Evoke 1200/1200B × 1, Yoke × 1, Power Supply × 1, Reflector × 1, DC Connection Cable 7.5M × 1, AC Power Cable 6M × 1, AS-CP-QR-EV Evoke Quick Release Clamp × 1, USB Flash Drive × 1, WS-RC-C2 Remote Controller × 1, User Manual × 1, DMX Reference Guide × 1

Evoke 1200 / 1200B LED Spot Light

Multiple Accessories, More Applications


					
FL-35YK Fresnel Lens Art.-Nr.: 93063	FL-28 Fresnel Lens Art.-Nr.: 93062	SB-NLM-120/150-PR Parabolic Softbox 120/150cm Art.-Nr.: 93065/66	SB-NLM-150-O Octagonal Softbox 150cm Art.-Nr.: 93067	LT-NLM-120 Lantern Softbox 120cm Art.-Nr.: 93068	SB-NLM-100-S Square Softbox 100cm Art.-Nr.: 93064
					
RF-NLM-26/45/60 NL Mount Reflector 26°/45°/60° Art.-Nr.: 93069/70/71	FR-JP-2 Two-light Frame with Junior Pin Art.-Nr.: 93090	FR-JP-4 Four-light Frame with Junior Pin Art.-Nr.: 93091	WC-LM6P-C1 Wired Controller Art.-Nr.: 93046	CB-LM6P-8M Connection Cable Art.-Nr.: 93040	CB-EV1200-10M/12M Connection Cable 10M/12M Art.-Nr.: 93085/93086

Evoke Technical Data

Model	Evoke 1200	Evoke 1200B
Rated Power	1200W	1200W
Input Voltage/Current	DC 48V/25A Max, AC 100-240V 50/60Hz	DC48V/25A Max, AC100-240V 50/60Hz
CRI	96	Average 96
TLCI	97	Average 97
CCT	3200K/5600K	2700K-6500K
Dimming	0-100%, stepless 0.1% from 0-100%	
IP Rating	IP54	
Control	On-board, Remote Control, NANLINK APP, DMX/RDM, Lumenradio CRMX	
On Board Effects	CCT Loop (Bi-color), INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion, Welding	
Product Size	Light Fixture (without Yoke): 330×241×210mm/12.99×9.48×8.26" Light Fixture (with Yoke): 503×370×210mm/19.8×14.56×8.26" Power Supply: 376.5×181×246mm/14.82×7.12×9.68"	
Product Weight	Light Fixture: 6.94kg/15.3lb Yoke: 1.84kg/4.05lb Power Supply: 10.5kg/23.14lb	Light Fixture: 7.75kg/17.09lb Yoke: 1.84kg/4.06lb Power Supply: 10.5kg/23.15lb

Illumination(lux/ft)


Model	Evoke 1200							
CCT	5600K							
Distance	3M	5M	7M	10M	3M	5M	7M	10M
Light Only	5532 lux / 514 fc	2373 lux / 220 fc	1266 lux / 118 fc	679 lux / 63 fc				
With 26° Reflector	58050 lux / 5395 fc	18370 lux / 1707 fc	9180 lux / 853 fc	4626 lux / 430 fc				
With 45° Reflector	18460 lux / 1715 fc	6583 lux / 612 fc	3671 lux / 341 fc	2021 lux / 188 fc				
With 60° Reflector	12460 lux / 1158 fc	4645 lux / 432 fc	2654 lux / 247 fc	1432 lux / 133 fc				
With Fresnel Lens 11°	65280 lux / 6065 fc	22080 lux / 2051 fc	11765 lux / 1093 fc	6308 lux / 586 fc				
With Fresnel Lens 45°	15170 lux / 1409 fc	5718 lux / 531 fc	3065 lux / 285 fc	1644 lux / 153 fc				
Model	Evoke 1200B							
CCT	3200K				5600K			
Distance	3M	5M	7M	10M	3M	5M	7M	10M
Light Only	4571 lux / 425 fc	1955 lux / 182 fc	1088 lux / 101 fc	558 lux / 52 fc	5258 lux / 488 fc	2244 lux / 208 fc	1261 lux / 117 fc	647 lux / 60 fc
With 26° Reflector	51950 lux / 4826 fc	16180 lux / 1503 fc	8035 lux / 746 fc	4320 lux / 401 fc	61030 lux / 5670 fc	18860 lux / 1752 fc	9377 lux / 871 fc	5005 lux / 465 fc
With 45° Reflector	15900 lux / 1477 fc	5816 lux / 540 fc	3320 lux / 308 fc	1857 lux / 173 fc	18570 lux / 1725 fc	6800 lux / 632 fc	3872 lux / 360 fc	2154 lux / 200 fc
With 60° Reflector	10210 lux / 949 fc	4117 lux / 382 fc	2382 lux / 221 fc	1307 lux / 121 fc	12240 lux / 1137 fc	4725 lux / 439 fc	2800 lux / 260 fc	1514 lux / 141 fc
With Fresnel Lens 11°	43480 lux / 4039 fc	15610 lux / 1450 fc	8056 lux / 748 fc	4119 lux / 383 fc	49940 lux / 4639 fc	17810 lux / 1655 fc	9211 lux / 856 fc	4710 lux / 438 fc
With Fresnel Lens 45°	11320 lux / 1052 fc	4603 lux / 428 fc	2693 lux / 250 fc	1474 lux / 137 fc	13010 lux / 1209 fc	5286 lux / 491 fc	3067 lux / 285 fc	1702 lux / 158 fc

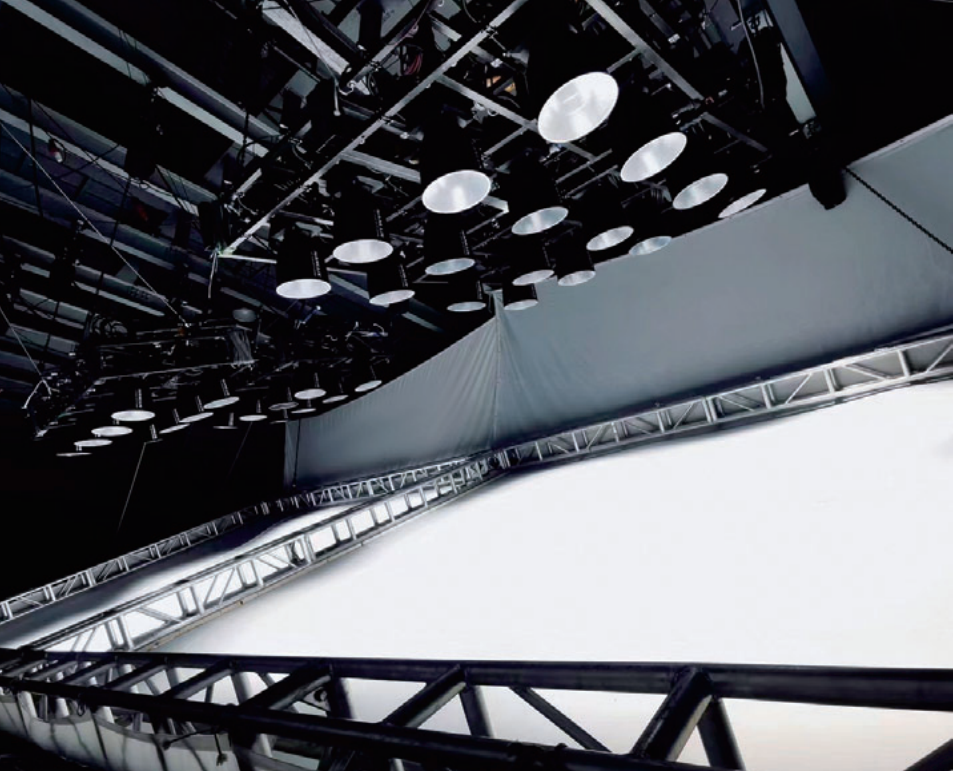

Evoke 2400B Bi-color

LED Spot Light

1. Ultra high luminance of 41,910 lux @3m (at 5600K, with 45° reflector) that comparable to a 10K Tungsten or 4K HMI light
2. Wide CCT range of 2700K-6500K with G/M $\pm$ 80 adjustment
3. Built with electronic contacts, enable modifier recognition function
4. IP55 of both fixture and power supply providing thorough protection
5. Fully dimmable from 0 to 100% with 0.1% increment
6. Adjustable cooling system includes SMART, FULL SPEED, LOW SPEED, OFF modes
7. Comprehensive wired and wireless control methods: On-board, Remote Controller, NANLINK APP, Wire Controller, DMX/RDM, LumenRadio CRMX, Art-Net/sACN
8. Built-in 12 customisable practical effects

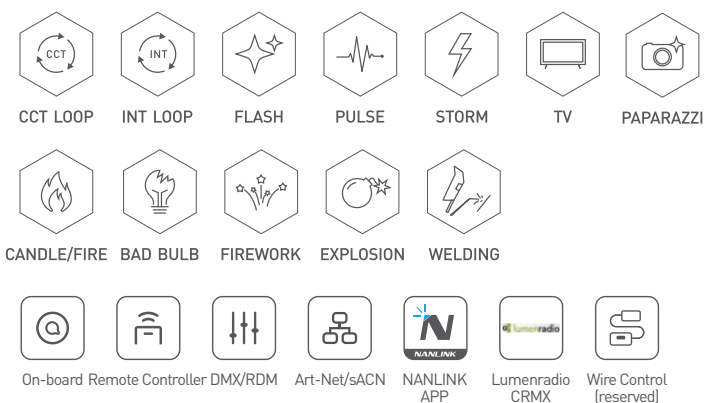

Evoke 2400B

Evoke 2400B		Technical Data	
Model	Evoke 2400B		
Rated Power	2400W		
Input Voltage/Current	DC48V/26A × 2, AC100V-240V 50/60Hz 26A Max		
CCT	2700K-6500K (G/M±80)		
CRI	Average 96		
TLCI	Average 97		
TM-30	Rf: Average 95 / Rg: Average 100		
Dimming	0-100%, stepless 0.1% from 0-100%		
IP Rating	IP55		
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM, LumenRadio CRMX, Art-Net/sACN,Wire Control (reserved)		
Effects	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion, Welding		
Product Size	Light Fixture (without COB protective cap): 427.3 × 316.4 × 265.1mm / 16.8 × 12.5 × 10.4" Power Supply: 389.2 × 172.2 × 268.3mm / 15.3 × 6.8 × 10.6"		
Product Weight	Light Fixture (without COB protective cap): 15kg / 33.1lb Power Supply: 11.58kg / 25.53lb		
Illumination (lux / fc)			
CCT	Distance	Light Only	With 45°Reflector
3200K	3M	8732 lux / 811 fc	36710 lux / 3410 fc
	5M	3478 lux / 323 fc	12270 lux / 1140 fc
	7M	1848 lux / 172 fc	6381 lux / 593 fc
	9M	1152 lux / 107 fc	3872 lux / 360 fc
5600K	3M	9584 lux / 890 fc	41910 lux / 3893 fc
	5M	3801 lux / 353 fc	14070 lux / 1307 fc
	7M	2028 lux / 188 fc	7254 lux / 674 fc
	9M	1266 lux / 118 fc	4401 lux / 409 fc

Evoke 2400B (Carton Packaging)



Art.-Nr.: 93096

Includes

Evoke 2400B×1, Yoke×1, Power Supply×1, RF-NLM-45-EV2400 Reflector 45°×1, USB Drive×1, AS-CP-QR-EV Quick Release Clamp×1, WS-RC-C2 Remote Controller×1, DC Connection Cable 7.5M×1, AC Power Cable 3M×1, User Manual×1

Evoke 2400B KIT-FO (Flight Case Standard Kit)



Art.-Nr.: 93094

Includes

Evoke 2400B×1, Yoke×1, Power Supply×1, USB Drive×1, AS-CP-QR-EV Quick Release Clamp×1, CC-EV2400-FT-FO Flight Case×1, WS-RC-C2 Remote Controller×1, DC Connection Cable 7.5M×1, AC Power Cable 3M×1, User Manual×1, RF-NLM-45-EV2400 Reflector 45° with soft bag×1

Evoke 2400B Kit (Flight Case Kit)



Art.-Nr.: 93097

Includes

Evoke 2400B×1, Yoke×1, Power Supply×1, RF-NLM-45-EV2400 Reflector 45°×1, USB Drive×1, AS-CP-QR-EV Quick Release Clamp×1, CC-EV2400-FT Flight Case×1, WS-RC-C2 Remote Controller×1, DC Connection Cable 7.5M×1, AC Power Cable 3M×1, User Manual×1

Multiple Accessories, More Applications



RF-NLM-30-EV2400

30° Reflector
Art.-Nr.: 93059



RF-NLM-60-EV2400

60° Reflector
Art.-Nr.: 93060



FL-35E

New Fresnel Lens for Evoke 2400B
Art.-Nr.: 93061



SB-NLM-100-S

Square Softbox 100cm
Art.-Nr.: 93064



SB-NLM-150-O

Octagonal Softbox 150cm
Art.-Nr.: 93067



SB-NLM-120-PR

Parabolic Softbox 120cm
Art.-Nr.: 93065



SB-NLM-150-PR

Parabolic Softbox 150cm
Art.-Nr.: 93066



LT-NLM-120

Lantern Softbox 120cm
Art.-Nr.: 93068



RF-NLM-45-EV2400

45° Reflector
Art.-Nr.: 93095



WC-LM6P-C1

6 Pin Wired Controller
Art.-Nr.: 93046



CB-LM6P-8M

Connection Cable 8 m
Art.-Nr.: 93040



FR-JP-2

Two-light Frame with Junior Pin
Art.-Nr.: 93090



FR-JP-4

Four-light Frame with Junior Pin
Art.-Nr.: 93091



CC-EV2400-FT-F0

Flight Case
Art.-Nr.: 93098



CC-EV2400-FT


Flight Case also for 45° Reflector
Art.-Nr.: 93099



Dyno 650C / 1200C

RGBWW LED Soft Panel Light

1. High power LED soft panel lights with ultra wide illumination, fully tunable between 2700K-20000K
2. Fully dimmable from 0-100% in ultra-precise intervals of just 0.1%
3. Support both wired and wireless control via NANLINK APP, DMX/RDM, Remote Control and Lumenradio CRMX
4. Built-in 15 customisable practical effects
5. Choice of color modes HSI, RGBW, Gel and XY
6. Intuitive user interface providing effortless control
7. Multiple optional modifiers and compatible with DoPchoice

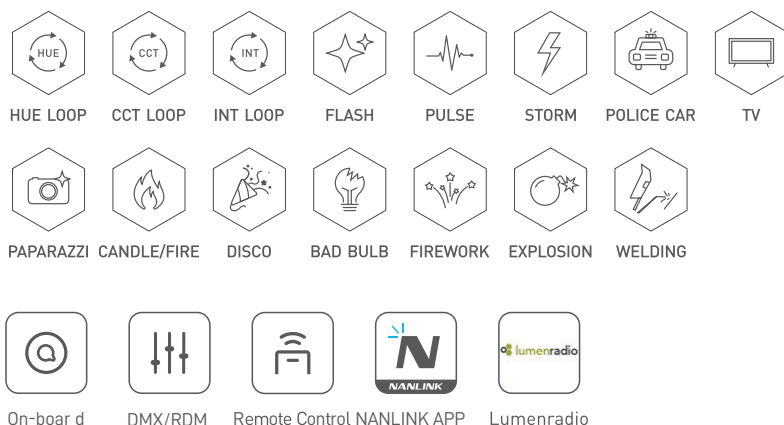

Includes:

Dyno650C/Dyno 1200C × 1, Power Supply × 1, Connection Cable 5M × 1, Power Cable 3M × 1, Standard Diffuser × 1, AS-SCH-DN Dyno Super Clamp × 1, USB Flash Drive × 1, User Manual × 1, DMX Reference Guide × 1

Multiple Accessories, More Applications

SB-DN650C/1200C-RT+EC
 Rectangular softbox
 Art.-Nr.: 93017/93018

SB-DN650C/1200C-O+EC
 Octangle softbox
 Art.-Nr.: 93020/93021

EC-DN650C/1200C
 Eggcrate
 Art.-Nr.: 93014/93015

AS-FC-DN650C/DN1200C
 Fixture Cover
 Art.-Nr.: 93029/93030

BD-DN650C/1200C
 Barndoor
 Art.-Nr.: 93011/93012

CC-FT-650C/1200C
 Flight Case
 Art.-Nr.: 93035/93036

SB-SL-DN650C/1200C
 Space Light Softbox
 Art.-Nr.: 93023/93024

DF-DN650C/1200C-ITSF
 Diffusion Intensifier
 Art.-Nr.: 93032/93033


Dyno		Technical Data							
Model		Dyno 650C				Dyno 1200C			
Rated Power		650W				1200W			
AC Amp Requirements		110V 6.36A, 220V 3.18A, 240V 2.91A				110V 12.72A, 220V 6.36A, 240V 5.83A			
Input Voltage/Current		DC48V/ 14. 6A Max, AC100-240V 50/60Hz				DC48V/ 29. 2A Max, AC100-240V 50/60Hz			
OPTICAL		Beam Angle: 160° LED Type: RGBWW							
CRI		Average 95							
TLCI		Average 95							
CCT		2700K-20000K (G/M±100)							
Dimming		0-100%, stepless 0.1% from 1%-100%							
Control		On-board, Remote Control, NANLINK APP, DMX/RDM, Lumenradio CRMX							
On Board Effects		Hue Loop, CCT Loop, INT Loop, Flash, Pulse, Storm, Police Car, TV, Paparazzi, Candle/Fire, Disco, Bad Bulb, Firework, Explosion, Welding							
Housing		Aluminium							
Mounting		Fully adjustable yoke 5/8" (28mm) Junior pin							
Cooling		Fan, Max ambient temp:45°C							
Product Size		Light fixture: 857×173×630mm/33.74×6.81×24.80" Power supply: 134×104×460mm/5.31×4.09×18.11"				Light fixture: 1023×173×918mm/40.28×6.81×36.14" Power supply: 191×134×460mm/7.52×5.28×18.11"			
Product Weight		Light fixture: 15.8kg/34.8lb Power supply: 4.2kg/9.3lb				Light fixture: 26.2kg/57.8lb Power supply: 7.5kg/16.5lb			
Illumination(lux/ft)									
Model		Dyno 650C				Dyno 1200C			
Distance		3M	5M	7M	9M	3M	5M	7M	9M
CCT Boost Mode	3200K	2403 lux 223 fc	979 lux 91 fc	546 lux 51 fc	339 lux 31 fc	5083 lux 472 fc	2077 lux 193 fc	1145 lux 106 fc	720 lux 67 fc
	5600K	2649 lux 246 fc	1082 lux 101 fc	601 lux 56 fc	373 lux 35 fc	5596 lux 520 fc	2282 lux 212 fc	1247 lux 116 fc	779 lux 72 fc
CCT Standard Mode	3200K	2080 lux 193 fc	850 lux 79 fc	474 lux 44 fc	293 lux 27 fc	4403 lux 409 fc	1804 lux 168 fc	975 lux 91 fc	613 lux 57 fc
	5600K	2237 lux 208 fc	919 lux 85 fc	512 lux 48 fc	318 lux 30 fc	4718 lux 438 fc	1934 lux 180 fc	1048 lux 97 fc	658 lux 61 fc



TK-140B / 280B

LED Bi-color Soft Panel Light

1. Allow precision color temperature adjustment between 2700K and 7500K
2. Flicker free, fully dimmable between 0 and 100%
3. Built-in 12 customisable practical effects
4. Support both wired and wireless control via NANLINK APP, DMX/RDM, Remote Control and Lumenradio CRMX
5. Can be powered either by AC adapter provided or an optional 14.8V/26V battery
6. Universal installation, available with a choice of yoke or central mount

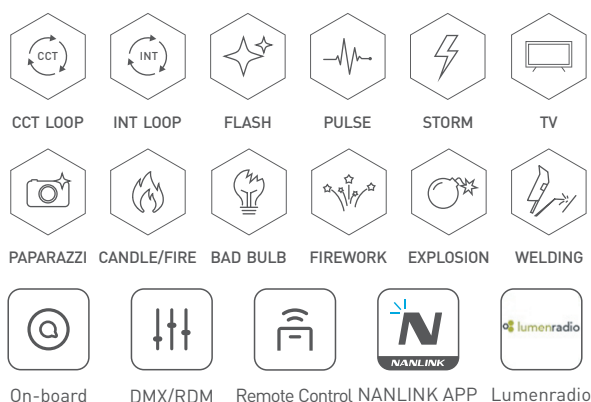

Includes:

TK-140B/280B x 1, Barn door x 1, Power Supply x 1, Power Cable x 1, Yoke x 1, User Manual x 1, DMX Reference Guide x 1

Multiple Accessories, More Applications



Take TK-140B/280B Anywhere

Lightweight, portable and with a choice of power options, using either the AC adapter provided, or with an optional 14.8V/26V battery



TK Technical Data

Model	TK-140B	TK-280B
Rated Power	160W	280W
Input Voltage/Current	DC 24V/6.67A Max, AC 100-240V 50/60Hz	DC 48V/5.84A Max, AC 100-240V 50/60Hz
Beam Angle	120°	
CRI	Average 95	
TLCI	Average 98	
CCT	2700K-7500K	
Dimming	0-100%	
Control	On-board, Remote Control, NANLINK APP, DMX/RDM, Lumenradio CRMX	
Effects	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding	
Housing	Aluminium	
Mounting	Yoke, Central Mount	
Cooling	Passive air cooling	
Product Size	Light fixture (with yoke): 890×85×540mm/35.04×3.35×21.26"	Light fixture (with yoke): 1340×85×540mm/52.76×3.35×21.26"
Product Weight	Light fixture+Yoke+Barndoor: 8.52kg/18.78lb	Light fixture+Yoke+Barndoor: 13.76kg/30.33lb

Illumination (lux / fc)


Model	TK-140B		TK-280B	
Distance	3200K	5600K	3200K	5600K
1M	3506 lux / 326 fc	3757 lux / 349 fc	5572 lux / 518 fc	5900 lux / 548 fc
3M	407 lux / 38 fc	428 lux / 40 fc	809 lux / 75 fc	860 lux / 80 fc
5M	168 lux / 16 fc	175 lux / 16 fc	333 lux / 31 fc	353 lux / 33 fc
7M	93 lux / 9 fc	97 lux / 9 fc	185 lux / 17 fc	195 lux / 18 fc



TK-200 / 450

LED Daylight Soft Panel Light

1. Ultra-efficient, bright, daylight illumination
2. Flicker free, fully dimmable between 0 and 100%
3. Built-in 11 customisable practical effects
4. Support both wired and wireless control via NANLINK APP,
DMX/RDM, Remote Control and Lumenradio CRMX

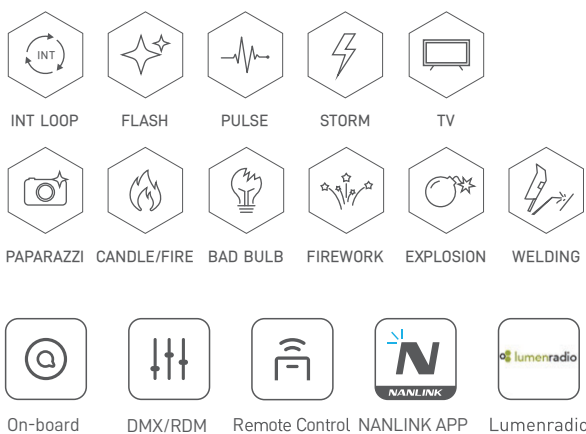

TK-200

TK-450

BRIGHTER AND STRONGER, DEDICATE TO PROFESSIONAL

TK-200/450 is an exceptional high power and compact LED panel with uniform lighting in the market. Power reach up to 240W and 455W and able to produce stronger output and meet the illumination requirements in the large scene.

Includes:

TK-200/450 × 1, Barndoor × 1,
 Power Supply × 1, Power Cable × 1,
 Yoke × 1, DMX Reference Guide × 1,
 User Manual × 1,
 Connection cable × 1 (Only for TK-450)

Multiple Accessories, More Applications



EC-TK200/450
Eggcrate



CC-TK200/450-2-FT
Flight case for Dual TK-200/450



HC-TK200/450
Honeycomb Grid



AS-FC-TK200/450
Fixture Cover

TK Technical Data		
Model	TK-200	TK-450
Rated Power	240W	455W
Input Voltage/Current	DC 24V/10.4A Max, AC 100-240V 50/60Hz	DC 48V/10A Max, AC 100-240V 50/60Hz
Beam Angle	120°	
CRI	96	
TLCI	98	
CCT	5600K	
Dimming	0-100%	
Control	On-board, Remote Control, NANLINK APP, DMX/RDM, Lumenradio CRMX	
Effects	INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding	
Housing	Aluminium	
Mounting	Yoke	
Cooling	Passive air cooling	
Product Size	Light fixture (with yoke): 890×85×540mm/35.04×3.35×21.3"	Light fixture (with yoke): 1340×85×540mm/52.76×3.35×21.3"
Product Weight	Light fixture+Yoke+Barndoor: 8.14kg/17.95lb	Light fixture+Yoke+Barndoor: 11.84kg/26lb
Illumination (lux / fc)		
Model	TK-200	TK-450
Distance	5600K	5600K
1M	6888 lux / 640 fc	12480 lux / 1159 fc
3M	901 lux / 84 fc	1776 lux / 165 fc
5M	374 lux / 35 fc	736 lux / 68 fc
7M	208 lux / 19 fc	405 lux / 38 fc



© Alexander Stanishev



© Rick Joaquim




© Senju Yamashita



© The Creation Store



© Djordje Stojilkovic

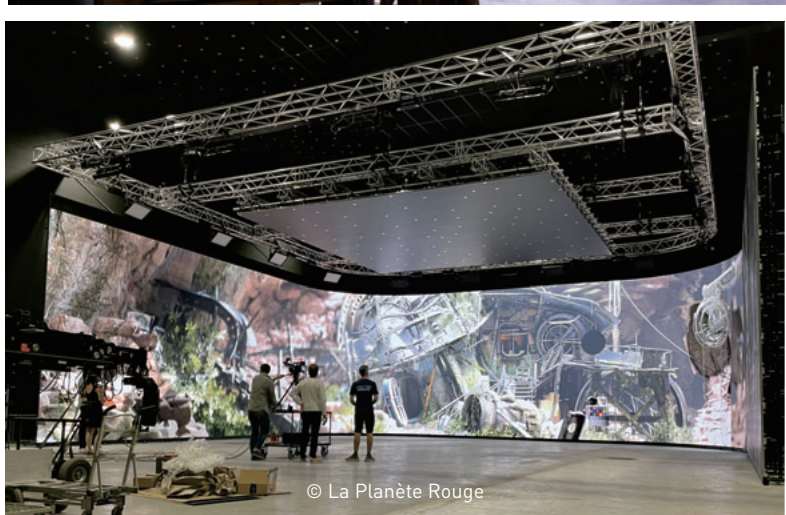

© La Planète Rouge




© Bruno Degrave



© James Smith



© Ivan Punk

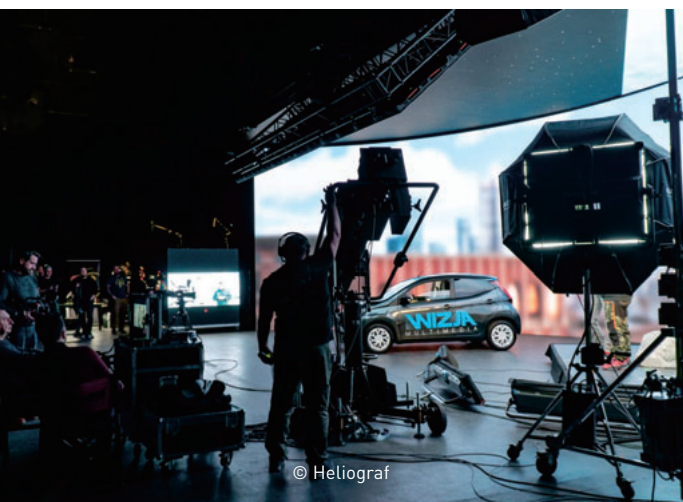

© Heliograf



© Pavel Khalitov



© Version 2

Distributed by

KAISER[®] FOTOTECHNIK

Kaiser Fototechnik GmbH & Co. KG
Im Krötenteich 2 · 74722 Buchen · Germany
Tel.: +49(0)6281 4070
www.kaiser-fototechnik.de
info@kaiser-fototechnik.de
WEEE-Rg.-Nr. DE 34742207

Follow us:



Die in diesem Prospekt beschriebenen Produkte sind für die Ausleuchtung von Bildaufnahmen bestimmt und nicht für andere Anwendungen.